
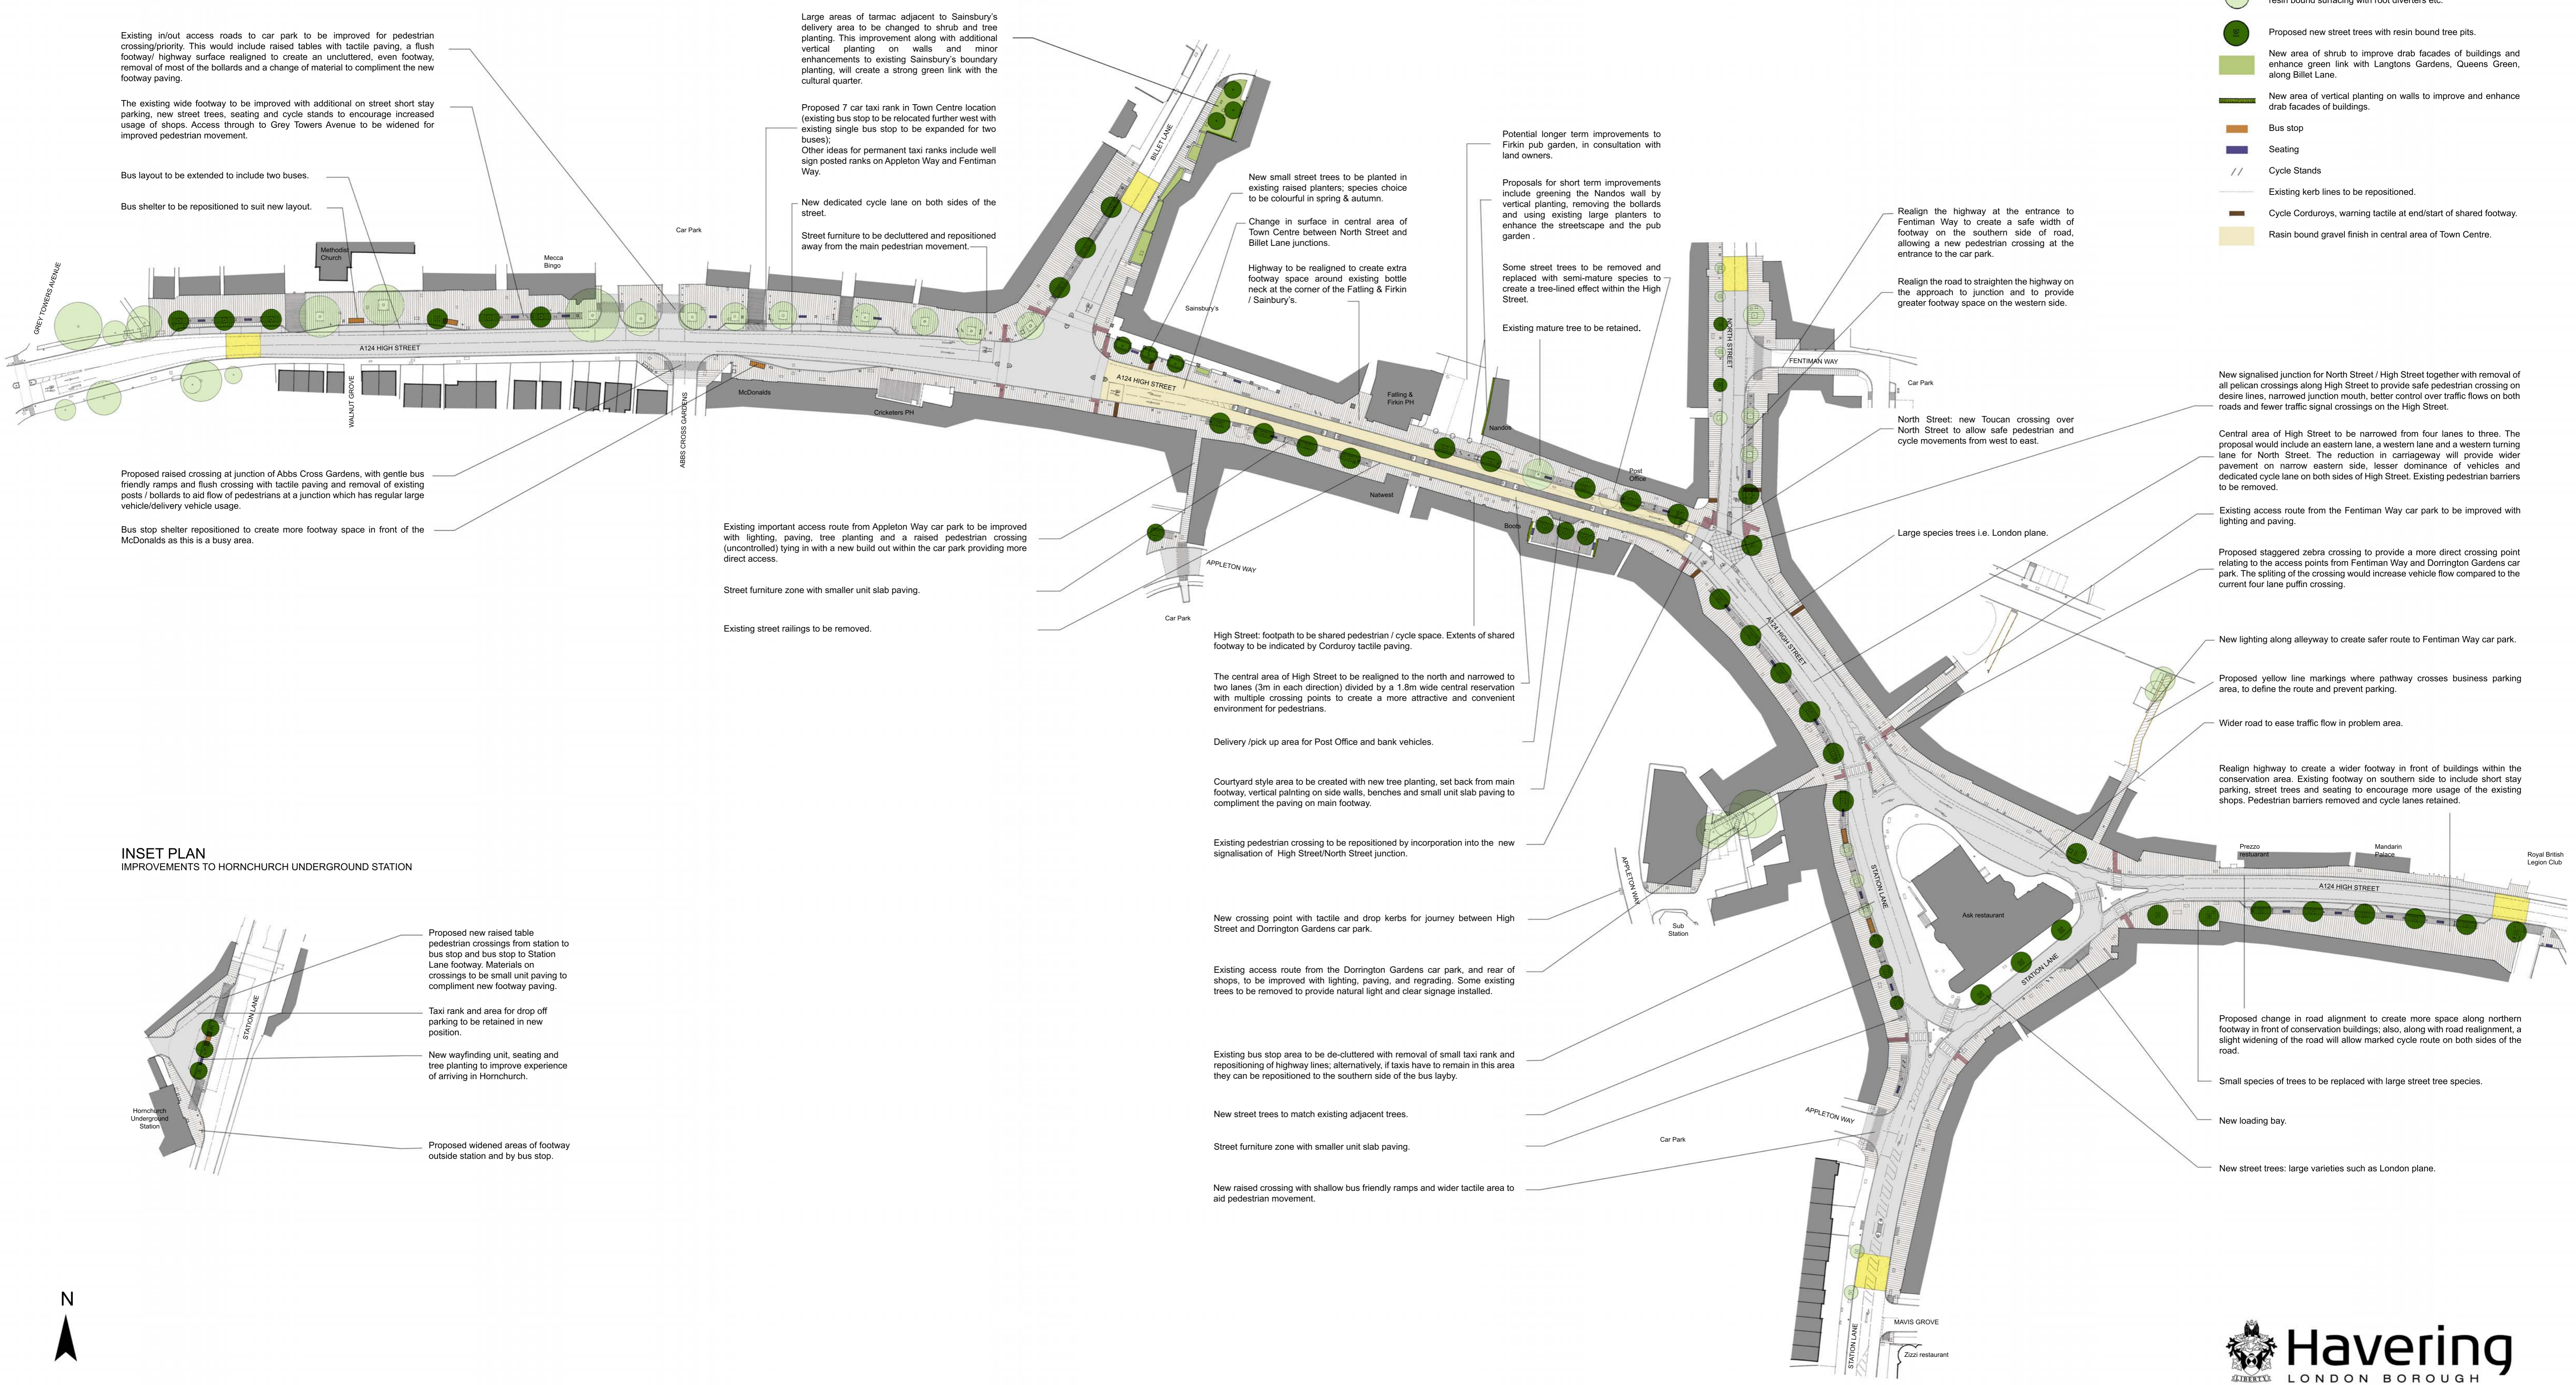


**SCHEDULE**

-  Proposed gateway zones for Hornchurch Town Centre – resin bound surface / bespoke signage / material change on footways / lighting scheme.
-  Areas of highway to be planned and resurfaced to allow adjust of kerb lines, markings and levels.
-  New footway paving, good quality concrete slabs, well detailed with concrete kerbing.
-  New good quality concrete slab paving to define street furniture zone.
-  New small unit paving for central reservation area, delivery/pick up bays, raised pedestrian crossings at junctions and vehicle access points across footways.
-  New raised pedestrian crossings at minor road junctions and across to rear car parks – uncontrolled.
-  Existing street trees to be retained, new improved tree pits in resin bound surfacing with root diverters etc.
-  Proposed new street trees with resin bound tree pits.
-  New area of shrub to improve drab facades of buildings and enhance green link with Langtons Gardens, Queens Green, along Billet Lane.
-  New area of vertical planting on walls to improve and enhance drab facades of buildings.
-  Bus stop
-  Seating
-  Cycle Stands
-  Existing kerb lines to be repositioned.
-  Cycle Corduroys, warning tactile at end/start of shared footway.
-  Resin bound gravel finish in central area of Town Centre.



**INSET PLAN**  
IMPROVEMENTS TO HORNCHURCH UNDERGROUND STATION

